



NAN YA PLASTICS CORPORATION
ELECTRONIC MATERIALS DIVISION.
COPPER CLAD LAMINATE DEPARTMENT

**Glass cloth base epoxy resin
flame retardant prepreg**

NO. 201. TUNG HWA N. ROAD,
TAIPEI, TAIWAN.

NP-140B PREPREG

■ FEATURES




- Rheology of resin controlled to benefit the lamination of the boards.
- Multi-functional epoxy provides outstanding heat resistance, better dimensional stability and through-hole reliability.
- Higher Tg: 138~142

■ PERFORMANCE LIST

Specification: IPC-4101B is applicable

Glass Style	RC%	RF%	GT sec (170)	VC%	After Pressed Thickness (per ply)	
					mm	mil
7628HR	50 ± 3	28 ± 5	130 ± 20	0.75 ↓	0.200 ± 0.01	7.9 ± 0.4
7628MR	47 ± 3	25 ± 5			0.190 ± 0.01	7.5 ± 0.4
7628	43 ± 3	20 ± 5			0.180 ± 0.01	7.1 ± 0.4
1506MR	52 ± 3	30 ± 5			0.160 ± 0.01	6.3 ± 0.4
1506	48 ± 3	25 ± 5			0.150 ± 0.01	6.0 ± 0.4
2116HR	58 ± 3	35 ± 5			0.130 ± 0.01	5.0 ± 0.4
2116MR	54 ± 3	30 ± 5			0.118 ± 0.01	4.6 ± 0.4
2116	50 ± 3	25 ± 5			0.105 ± 0.01	4.1 ± 0.4
2313	55 ± 3	30 ± 5			0.090 ± 0.01	3.5 ± 0.4
2113	56 ± 3	32 ± 5			0.090 ± 0.01	3.5 ± 0.4
2112	60 ± 3	37 ± 5			0.075 ± 0.008	3.0 ± 0.3
1086	62 ± 3	38 ± 5			0.074 ± 0.008	2.9 ± 0.3
1080HR	68 ± 3	47 ± 5			0.071 ± 0.008	2.8 ± 0.3
1080MR	65 ± 3	43 ± 5			0.068 ± 0.008	2.7 ± 0.3
1080	62 ± 3	38 ± 5			0.065 ± 0.008	2.6 ± 0.3
106	68 ± 3	40 ± 5			0.053 ± 0.008	2.1 ± 0.3
* 1086	62 ± 3	38 ± 5			0.074 ± 0.008	2.9 ± 0.3
* 1067	68 ± 3	36 ± 5			0.056 ± 0.008	2.2 ± 0.3
* 1078	62 ± 3	35 ± 5			0.065 ± 0.008	2.6 ± 0.3

*Laser drillable prepreg
Storage Stability

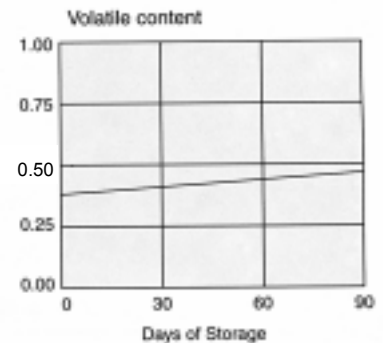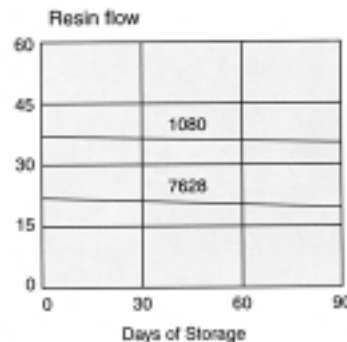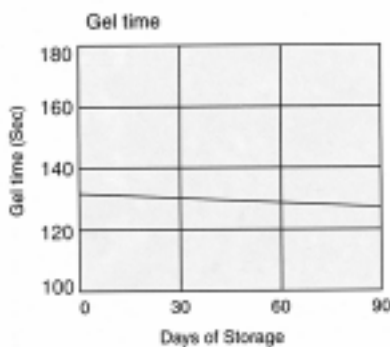


Storage Condition : 20 , 50% RH for 3 months
: Max 5 for 6 months


Data shown are nominal values for reference only.

Recommended press cycles:

A:2T2P (2 temperature step/2 pressure step)

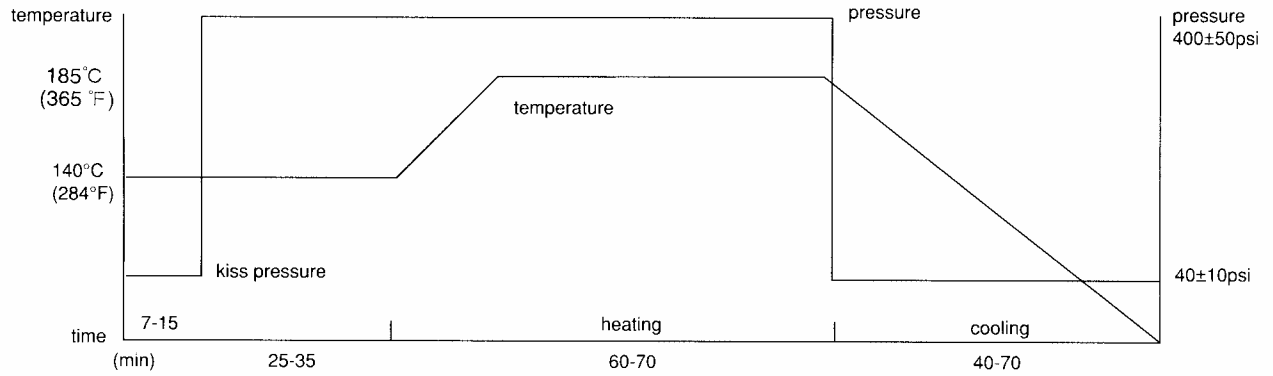

B:1T2P (1 temperature step/2 pressure step)

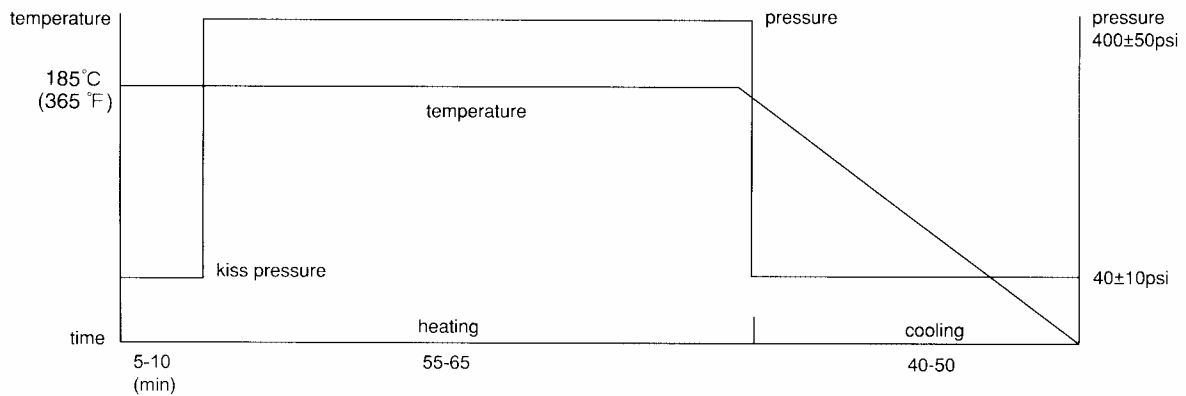

Suggestions:

1. Heating rate of material between 70 (158) and 140 (284)
 1-3 /min (1.8-5.4 /min) is acceptable.
 1.5-2.5 /min (2.7-4.5 /min) would be better.
2. Temperature of material over 170 /min(338) must be held for at least 40min. to allow epoxy resin to fully cure.
3. The pressure should be kept below 100psi during cooling to ambient temperature.
4. Cooling rate of material should be kept under 2.5 /min(4.5 /min) when the temperature of material is over 100 (212), in order to avoid introducing twist.

■ CERTIFICATION UL

• UL File No. : E98983 • ANSI TYPE:FR-4

UL 746 Recognition

Minimum Material Thickness Inch (mm)	Clad cond. Thickness Min. Max. Mils Mils (mic) (mic)		Max. Area Diameter Inch (mm)	Sold Lts Temp Time sec	UL 94 Flame Class	Max. Operating Temp
0.02 (0.051)	0.68 (17)	4.08 (102)	2.0 (50.8)	@ @	94V-0	130

@-Preheat 180 /20min, then 230 /2min, then 260 /20sec, the 260 /20sec.